


# Refrigerator/Freezer Thermometers

	2560	25HP-01	330	335-01	535-01	PM180
<b>Temperature Range:</b>	-30° to 50°C (-22° to 122°F)	-29° to 27°C (-20° to 80°F)	-40° to 50°C (-40° to 120°F)	-40° to 25°C (-40° to 80°F)	-30° to 50°C (-20° to 120°F)	-32° to 82°C (-25° to 180°F)
<b>Accuracy:</b>	0.5°C (±1°F)	±1°C (±2°F)	±1°C (±2°F)	±1°C (±2°F)	±2°C (±5°F)	±1°C (±2°F)
<b>Housing Material:</b>	Antimicrobial Plastic	Stainless Steel	Food Grade Plastic	Stainless Steel	Plastic	Plastic
<b>Dimensions:</b>	90 mm x 32 mm x 89 mm (3.562" x 1.25" x 3.5")	60 mm x 38 mm x 76 mm (2.375" x 1.5" x 3")	16 mm x 6.4 mm x 108 mm (0.625" x .25" x 4.25")	121 mm x 22 mm x 29 mm (4.75" x .875" x 1.125")	51 mm (2")	127 mm x 95 mm x 22 mm (5" x 3.75" x .875")
<b>Lens Material:</b>	Food Grade Polycarbonate	Glass	-	Food Grade Polycarbonate	Plastic	-
<b>Weight:</b>	43 g (1.5 oz)	43 g (1.5 oz)	7 g (.25 oz)	28 g (1 oz)	14 g (0.5 oz)	142 g (5 oz)
<b>Regulatory Listings:</b>	CE RoHS	NSL	NSL	NSL	-	CE RoHS
<b>Warranty:</b>	Lifetime	1 Year	1 Year	1 Year	1 Year	1 Year



**330**  
Vertical Glass Tube Refrigerator / Freezer Thermometer

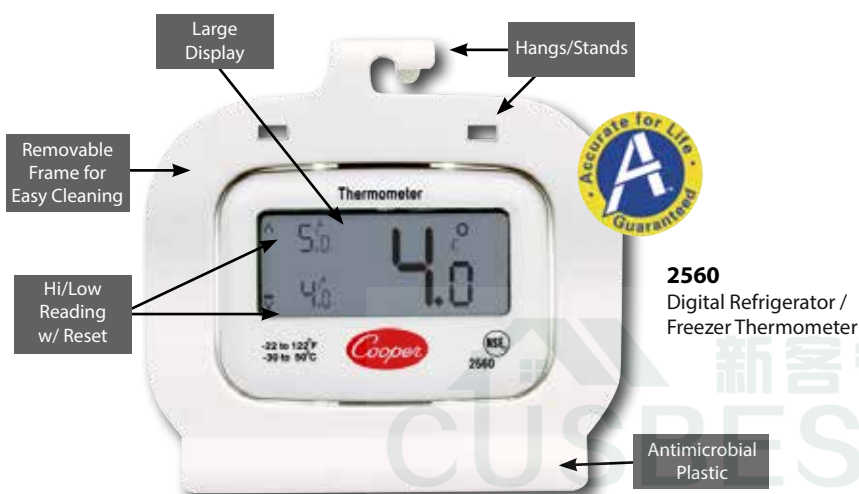

**2560**  
Digital Refrigerator / Freezer Thermometer



**PM180**  
Dual-Cool™ Panel Thermometer

The 2560 is a low temperature digital thermometer designed to hang, stand or mount within the food zone inside cold storage cabinets. Cable-ties included for added mounting security.

Cooper-Atkins' first dual temperature panel thermometer with interchangeable probes, Min/Max alarm settings and Hi/Lo temperature recall. Equipped with user-adjustable settings, it can simultaneously measure temperatures within two separate storage environments or two locations inside of the same reach-in, walk-in or hot-holding cabinet.

- PM180-01**
- PM180 Panel Thermometer
  - 2013 Air Probe
  - 2113 Solid Simulator Probe

- PM180-02**
- PM180 Panel Thermometer
  - (2) 2013 Air Probes

- PM180-03**
- PM180 Panel Thermometer
  - (2) 2113 Solid Simulator Probes



**2560 vs 25HP**  
Size Comparison